

# READ ME FIRST!

Reading these brief instructions before attempting to use your projector will improve your chances of success and reduce potential frustrations!



## SETTING UP YOUR PROJECTOR

- Complete and return the Warranty Registration Card.

### Table Clamp model - See inset diagram

Fasten the Table Clamp (G) to edge of table and secure firmly over base plate on Lower Suspension Tube (B).

Insert Upper Suspension Tube (C) in to Twist Grip Suspension Clamp (E) on Lower Suspension Tube (B), and tighten.

Attach Projector Head (A) by inserting the Upper Suspension Tube (C) in to the Tube to Head coupling at rear of Projector Head (A) and firmly tighten the Thumbscrew Lock Knob (D).

## GETTING STARTED

1. Place your 35mm slide in to the Slide Mount (K)
2. Connect power cord to grounded electrical outlet and switch the projector on with the Rocker Switch (H)
3. Loosen the Twist Grip Suspension Clamp (E) to Raise or Lower the projector head. Once image is desired SIZE, tighten the Twist Grip Clamp.
4. Move the Lens in and out until image is in focus (see "Focusing Your Image" diagram opposite)
5. To project horizontally, simply loosen the Thumbscrew Lock Knob (D) and swivel the head to the desired angle and tighten the Knob

### Enlarging your slide image:

Raise or Lower the the Projector Head (A) until the SIZE of image is achieved. The higher you raise the head, the larger the image becomes.

### Focussing your image:

Move the Lens Assembly (F) in and out until your image is in focus.

### Replacing the Halogen Lamp (G4 12v 20w)

The Halogen lamp included is a long-life bulb (rated for 2000hrs, under normal conditions). Only replace with appropriate lamp available from your dealer, Kopykake or electrical store. Replace by sliding off the Head cover after removing the 4 screws, make sure the lamp is cool, then pull. Replace cover when done.

## FOR BEST RESULTS


- Read these instructions above BEFORE using the projector.
- The projector will get hot when in use. If the projector is left switched on for a number of hours you risk causing damage to your slide.
- While Kopykake projectors give a bright, clear image; the darker the room the better. Avoid direct light for best results.

### Specifications

Copy Size: 35mm Slide	Range: Up to 16" x 24" vertically
Lens: 35mm F/4	Up to 72" x 96" horizontally
Illumination: 20w (20w 220v)	Cooling: Convection
Electrical: 110/120v 60hz (220/240 50hz)	Weight: 5lbs (2.4kg)

- A- Projector Head (K3500-H)
- B - Lower Suspension Tube (03160)
- C- Upper Suspension Tube (03041)
- D - Thumbscrew Lock Knob (SN003)
- E - Twist Grip Suspension Clamp (HP014)
- F - Lens Assembly (LA003)
- G - Table Clamp (03140)
- H - On/Off Rocker Switch (ES002)
- J - Halogen Lamp (L0006)
- K - Slide Mount

## Model K3500

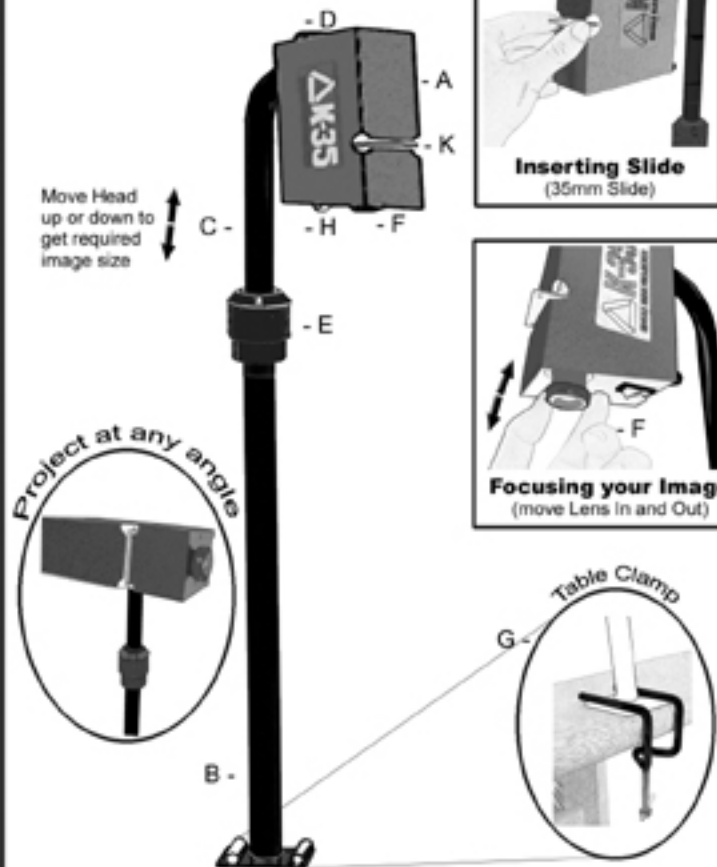

## Warranty & Returns Policy

All Kopykake projectors are tested before shipment and this Kopykake projector is guaranteed against any defect in material or workmanship for a period of 5 years. Any part of the equipment found to be defective under normal use during the warranty period will be repaired or replaced by Kopykake at its option. Kopykake assumes no responsibility for damaged equipment due to negligence by the user. **This warranty does not apply to lamps.**

### Returning your projector:

Any equipment being returned must have a Return Authorization Number (RA#) obtained from Kopykake. A product returned without an RA# will be subject to a delay in processing.

1. Contact Kopykake for a Return Authorization Number
2. Package your projector well to avoid damage in transit. Any damage will be assumed to have occurred prior to shipping so please be sure to protect the projector well
3. Include Proof of Purchase and a note explaining the reason for return
4. Mark the RA# on the note AND the exterior of the package so it can be easily identified
5. Return the projector via UPS or any other Carrier company

Equipment replaced or repaired under warranty will be returned freight or postage paid by Kopykake. The warranty period for repaired or replaced parts shall be for the duration of the original warranty.

We regret that any Returns to Stock will be subject to a 20% re-stocking fee.